

Pure Black PRO series

182 N-TOPCon Bifacial Module

465W ~ 475W



12 years product workmanship warranty





30 years linear power output warranty



1% 1st-year degradation

0.40% annual degradation

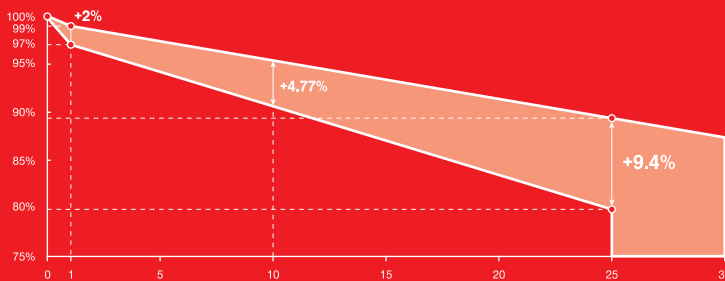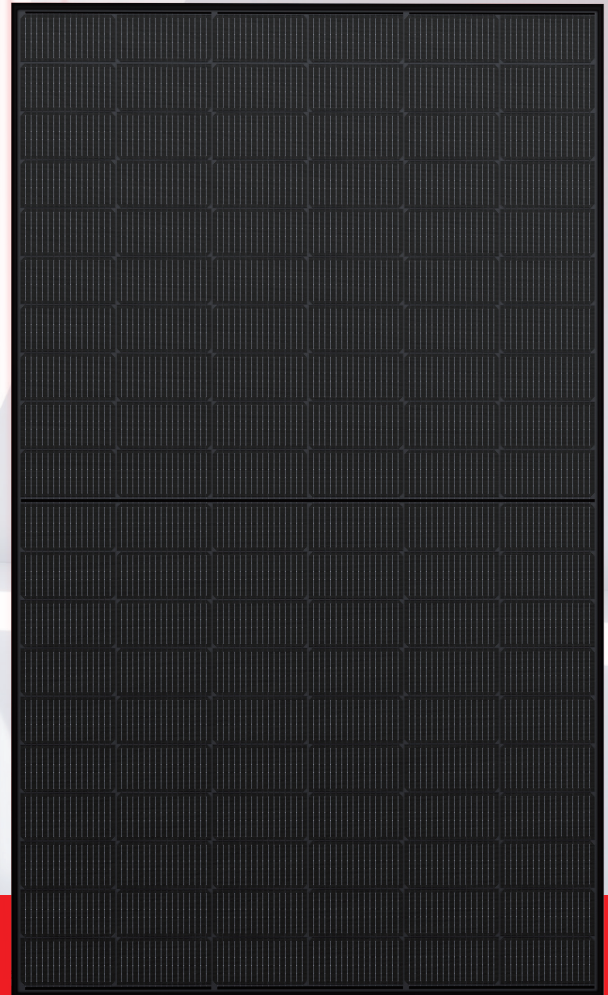

FEATURES AND BENEFITS



N-TOPCon brings 10-30% additional power generation comparing with conventional P-type module.



N-TOPCon solar cell has no LID naturally which can increase power generation.



Higher bifaciality, higher power output and lower BOS cost.



Double sides power output to reach higher comprehensive efficiency and get more profit.



Higher power output even under low-light environments like on cloudy or foggy days.



Higher power generation under working conditions, thanks to passivating contact cell technology.



More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area.

LESSO 182 Pure Black N-TOPCon Bifacial Module



Power Range
465W ~ 475W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
21.94%

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×35mm/30mm
Weight	26.9kg(35mm) / 25.7kg(30mm)
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm ² , portrait $\frac{400mm(+)}{200mm(-)}$, landscape $\frac{1400mm(+)}{1400mm(-)}$ Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	744pcs(35mm) / 864pcs(30mm)

(Unit: mm)

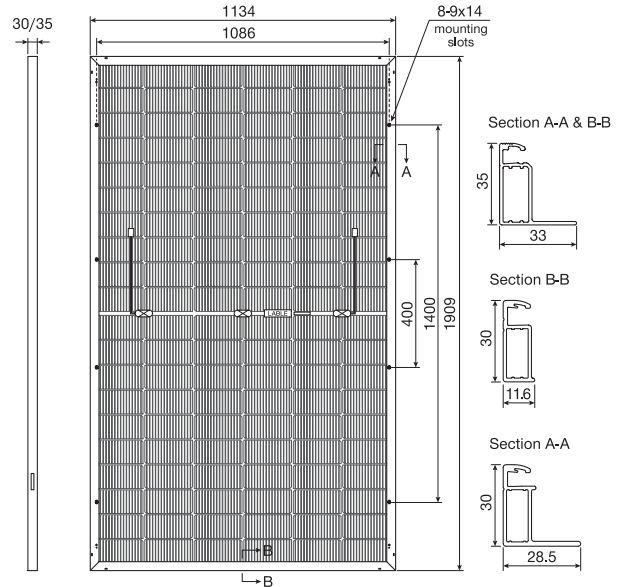


Electrical Performance Parameters | STC

Model Type	465C(BBD) 60(182)	470C(BBD) 60(182)	475C(BBD) 60(182)	
Nominal Max. Power	P _{max} (W)	465	470	475
Max. Power Voltage	V _{mp} (V)	34.63	34.85	35.06
Max. Power Current	I _{mp} (A)	13.43	13.49	13.55
Open Circuit Voltage	V _{oc} (V)	41.22	41.42	41.62
Short Circuit Current	I _{sc} (A)	14.52	14.58	14.64
Module Efficiency	(%)	21.48	21.71	21.94
Power Output Tolerance	(W)		0~+5W	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

* Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (430C)

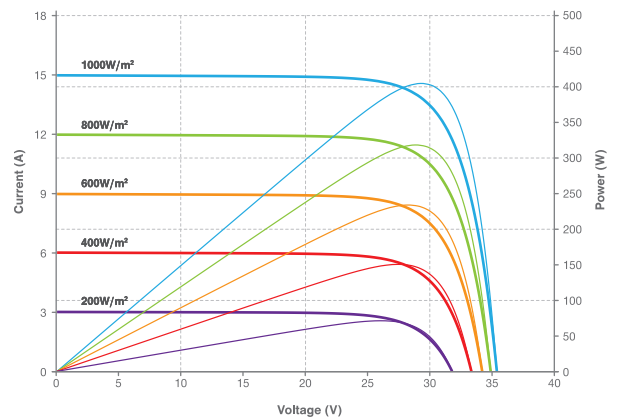

Electrical Performance Parameters | NMOT

Model Type	465C(BBD) 60(182)	470C(BBD) 60(182)	475C(BBD) 60(182)	
Nominal Max. Power	P _{max} (W)	349	353	357
Max. Power Voltage	V _{mp} (V)	32.68	32.87	33.06
Max. Power Current	I _{mp} (A)	10.68	10.74	10.80
Open Circuit Voltage	V _{oc} (V)	38.73	38.92	39.11
Short Circuit Current	I _{sc} (A)	11.81	11.86	11.91

* NMOT: Irradiance 800W/m², Cell Temperature 20°C, Wind Speed 1m/s.

* Power measurement tolerance ±3%.

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A