


N series

210R N-type Monofacial Module


545W ~ 565W

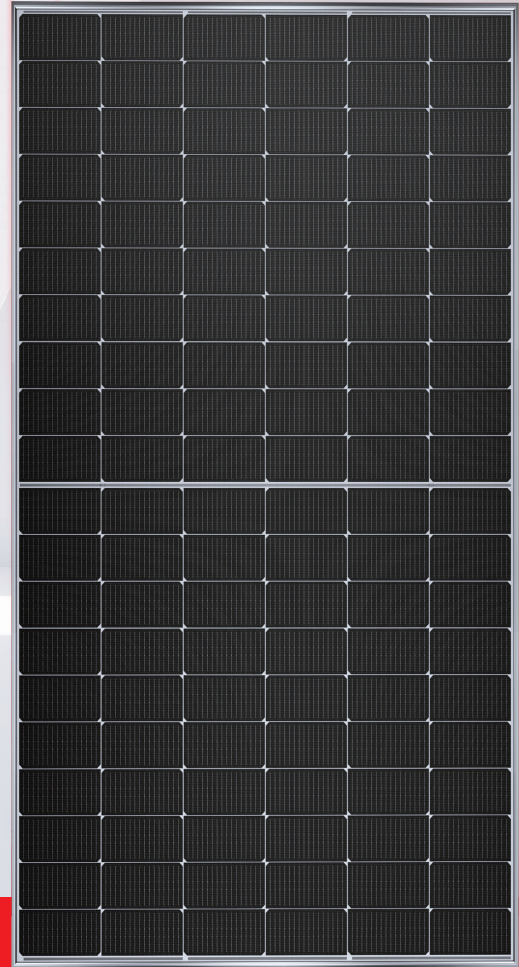

12 years product workmanship warranty

30 years linear power output warranty

1% 1st-year degradation
0.40% annual degradation

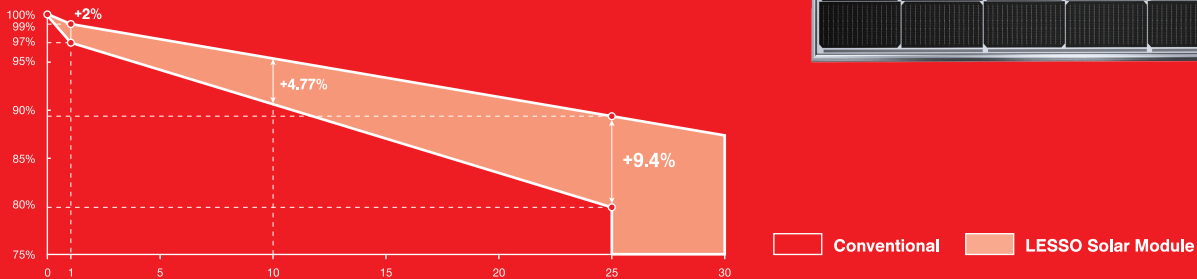

FEATURES AND BENEFITS



Topcon technology, higher power generation.



High density packaging, improving energy density.



Better temperature coefficient, more power generation.



Zero LID, increase power generation.



Even cloudy or foggy days, better weak illumination response.



Multiple weather, resistance tests, wider applicability.

LESSO 210R N-type Monofacial Module (60)



Power Range
545W ~ 565W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
22.94%

(Unit: mm)

Structure Performance

Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1134×35mm
Weight	29.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{230mm (-)} / landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	620pcs (horizontal packing) / 620pcs (vertical packing)

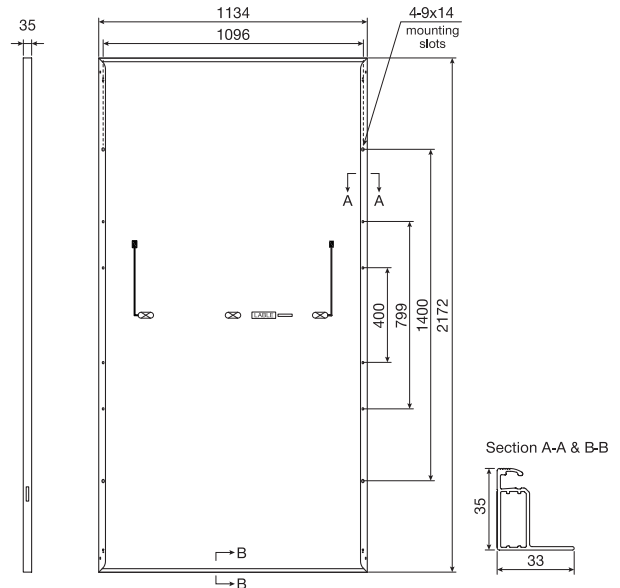


Electrical Performance Parameters

Model Type	545C(HPM)60(210R)		550C(HPM)60(210R)		555C(HPM)60(210R)		560C(HPM)60(210R)		565C(HPM)60(210R)	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power P_{MAX} (W)	545	411	550	415	555	419	560	423	565	427
Max. Power Voltage V_{MP} (V)	36.44	34.17	36.58	34.30	36.72	34.43	36.86	34.56	37.00	34.69
Max. Power Current I_{MP} (A)	14.96	12.03	15.04	12.10	15.12	12.17	15.20	12.24	15.28	12.31
Open Circuit Voltage V_{OC} (V)	44.11	41.86	44.24	41.98	44.36	42.10	44.48	42.22	44.60	42.34
Short Circuit Current I_{SC} (A)	15.86	12.79	15.95	12.86	16.04	12.93	16.12	13.00	16.21	13.07
Module Efficiency (%)	22.13		22.33		22.53		22.74		22.94	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (565C)

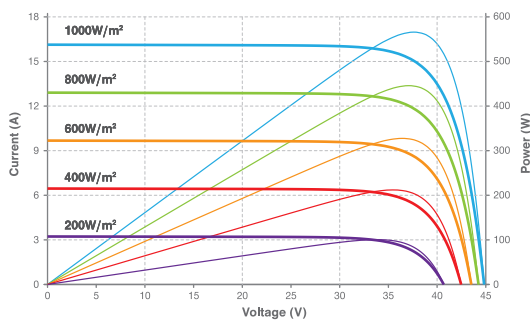

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I_{SC})	+0.043%
Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A