


Pure Black series



182 N-type Bifacial Module

565W ~ 585W

 **12** years product workmanship warranty

 **30** years linear power output warranty

 **1%** 1st-year degradation
0.40% annual degradation

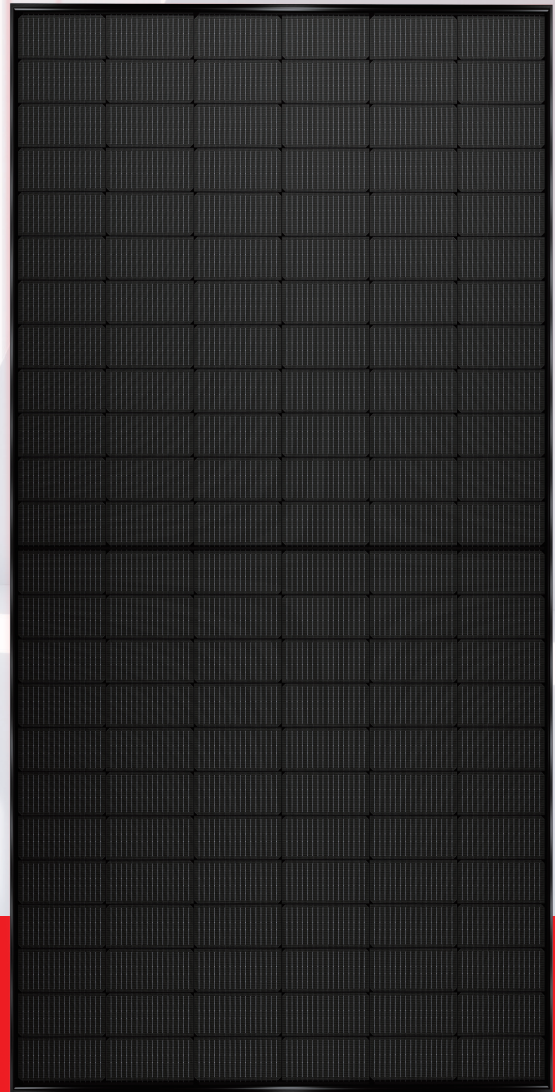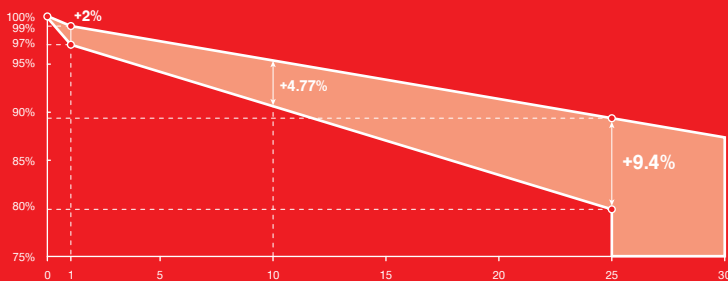

FEATURES AND BENEFITS



Topcon technology, higher power generation.



Highly-resistant black, crystal material, modernity to buildings.



Even cloudy or foggy days, better weak illumination response.



Zero LID, increase power generation.



High density packaging, improving energy density.



Higher power output, lower bos cost.



Multiple weather, resistance tests, wider applicability.



Double-sided generation, powerfully energy boost.

LESSO 182 Pure Black N-type Bifacial Module (72)



Power Range
565W ~ 585W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
22.65%

(Unit: mm)

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×35mm/30mm
Weight	32.3kg(35mm) / 31.2kg(30mm)
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm(+)} / _{200mm(-)} , landscape ^{1400mm(+)} / _{1400mm(-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	620pcs(35mm) / 720pcs(30mm)

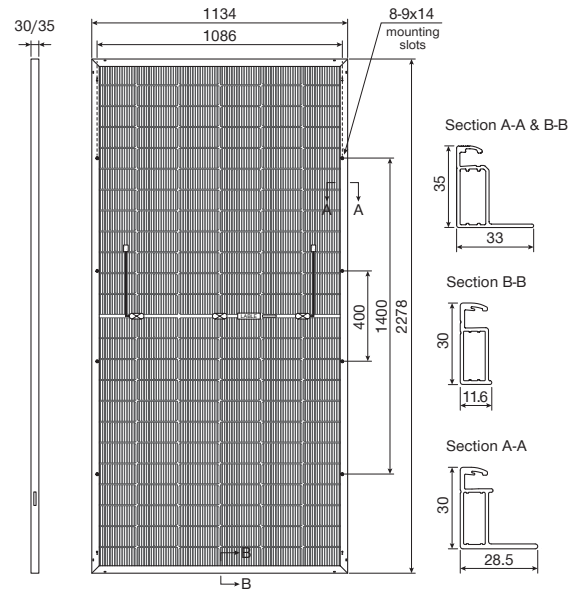


Electrical Performance Parameters

Model Type	565C(BBD)72(182)		570C(BBD)72(182)		575C(BBD)72(182)		580C(BBD)72(182)		585C(BBD)72(182)		
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P_{MAX} (W)	565	425	570	429	575	433	580	437	585	441
Max. Power Voltage	V_{MP} (V)	42.05	39.58	42.20	39.69	42.35	39.80	42.50	39.91	42.65	40.02
Max. Power Current	I_{MP} (A)	13.44	10.74	13.51	10.81	13.58	10.88	13.65	10.95	13.72	11.02
Open Circuit Voltage	V_{OC} (V)	50.53	47.99	50.73	48.18	50.92	48.37	51.12	48.56	51.32	48.75
Short Circuit Current	I_{SC} (A)	14.23	11.49	14.30	11.53	14.36	11.58	14.42	11.63	14.49	11.68
Module Efficiency	(%)	21.87		22.07		22.26		22.45		22.65	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (585C)

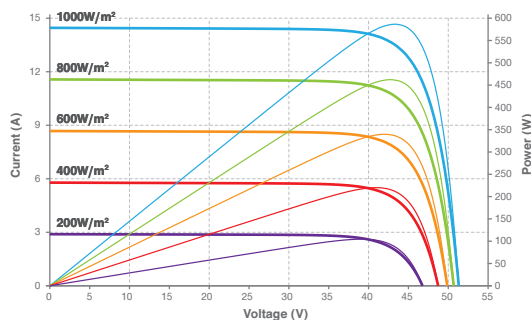

Bifacial Output-rearside Power Gain

Gain	Maximum Power		P_{MAX} (W)				
		P_{MAX} (W)	593	599	604	609	614
5%	Maximum Power	P_{MAX} (W)	593	599	604	609	614
	Module Efficiency	(%)	22.97%	23.17%	23.37%	23.57%	23.78%
10%	Maximum Power	P_{MAX} (W)	622	627	633	638	644
	Module Efficiency	(%)	24.06%	24.27%	24.48%	24.70%	24.91%
25%	Maximum Power	P_{MAX} (W)	706	713	719	725	731
	Module Efficiency	(%)	27.34%	27.58%	27.82%	28.07%	28.31%

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A