



N-TOPCon series

182 N-TOPCon Bifacial Module


625W ~ 645W



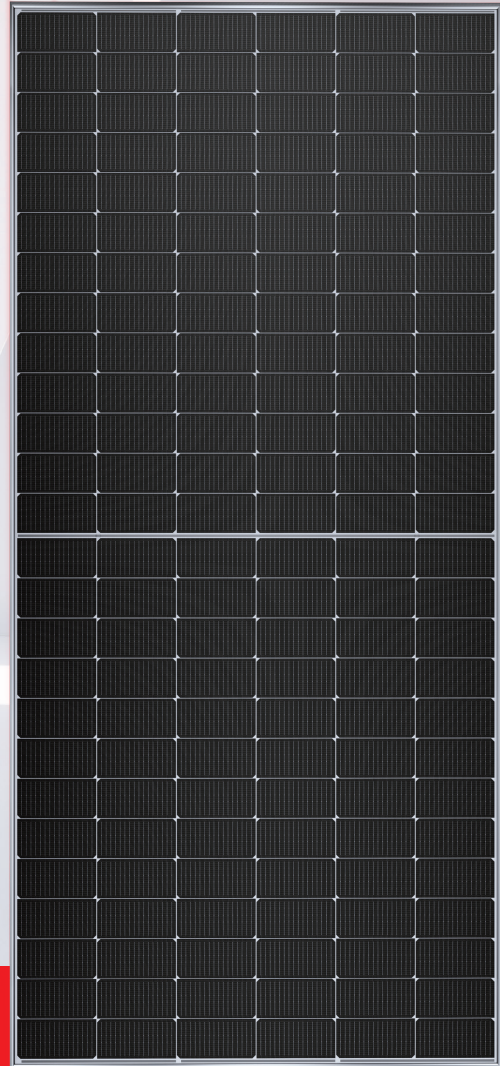



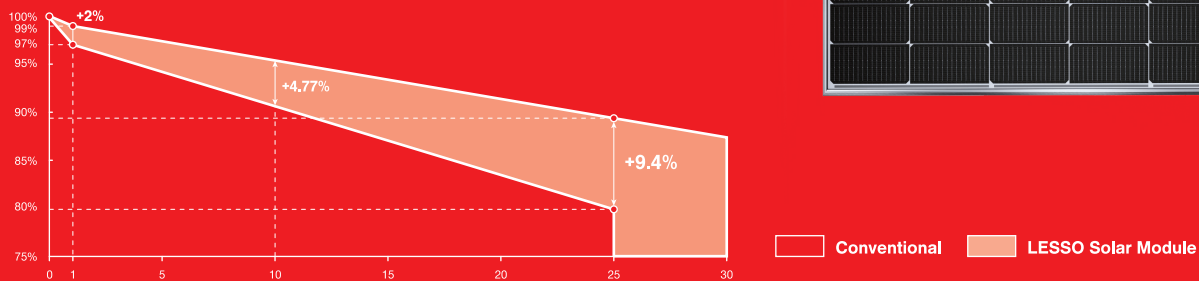


 **12** years product workmanship warranty

 **30** years linear power output warranty

 **1%** 1st-year degradation
0.40% annual degradation



FEATURES AND BENEFITS

-  N-TOPCon brings 10-30% additional power generation comparing with conventional P-type module.
-  N-TOPCon solar cell has no LID naturally which can increase power generation.
-  Higher bifaciality, higher power output and lower BOS cost.
-  Double sides power output to reach higher comprehensive efficiency and get more profit.
-  Higher power output even under low-light environments like on cloudy or foggy days.
-  Higher power generation under working conditions, thanks to passivating contact cell technology.
-  More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area.

LESSO 182 N-TOPCon Bifacial Module



Power Range
625W ~ 645W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
23.07%

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	156pcs(6x26)
Module Dimension	2465×1134×35mm/30mm
Weight	34.6kg(35mm) / 33.5kg(30mm)
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	496pcs(35mm) / 576pcs(30mm)

Electrical Performance Parameters | STC


Model Type	625C(HBD) 78(182)	630C(HBD) 78(182)	635C(HBD) 78(182)	640C(HBD) 78(182)	645C(HBD) 78(182)	
Nominal Max. Power	P _{max} (W)	625	630	635	640	645
Max. Power Voltage	V _{mp} (V)	46.24	46.37	46.50	46.63	46.76
Max. Power Current	I _{mp} (A)	13.52	13.59	13.66	13.73	13.80
Open Circuit Voltage	V _{oc} (V)	55.11	55.26	55.41	55.56	55.71
Short Circuit Current	I _{sc} (A)	14.34	14.42	14.50	14.58	14.66
Module Efficiency	(%)	22.36	22.54	22.72	22.90	23.07
Power Output Tolerance	(W)			0 ~ +5W		

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.


Electrical Performance Parameters | NMOT

Model Type	625C(HBD) 78(182)	630C(HBD) 78(182)	635C(HBD) 78(182)	640C(HBD) 78(182)	645C(HBD) 78(182)	
Nominal Max. Power	P _{max} (W)	470	474	478	482	486
Max. Power Voltage	V _{mp} (V)	43.47	43.60	43.73	43.86	43.99
Max. Power Current	I _{mp} (A)	10.83	10.88	10.94	11.00	11.05
Open Circuit Voltage	V _{oc} (V)	52.35	52.49	52.63	52.77	52.92
Short Circuit Current	I _{sc} (A)	11.57	11.63	11.70	11.76	11.83

* NMOT: Irradiance 800W/m², Cell Temperature 20°C, Wind Speed 1m/s.

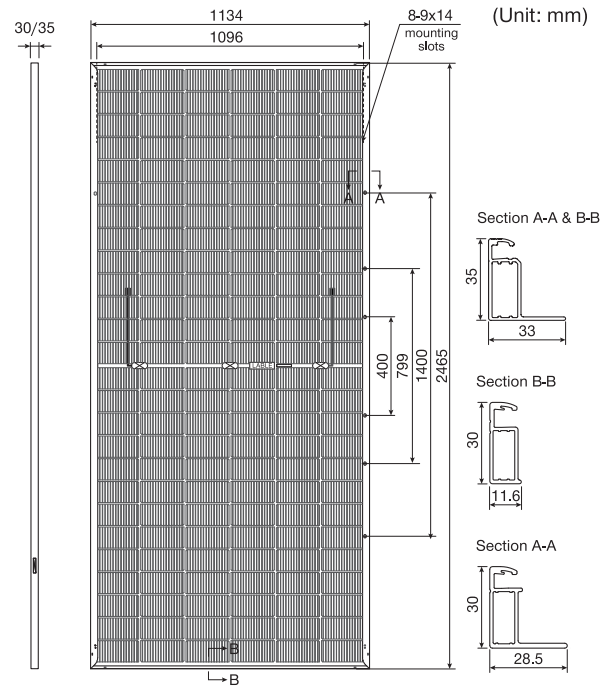

Current-Voltage & Power-Voltage Curve (645C)

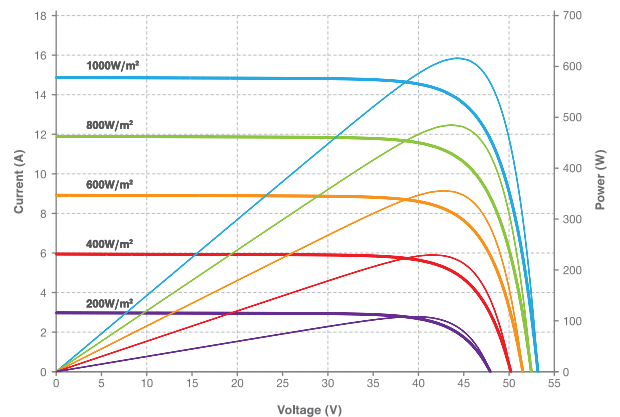

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%

Maximum Parameters

Working Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A