




Product Service

CERTIFICATE

No. Z2 116394 0028 Rev. 02

Holder of Certificate: **Guangdong Lesso Banhao
New Energy Technology Group Co., Ltd.**
 The 1st and 2nd floors of the workshop in Zone 2
 No. 58, Longzhou West Road
 Longjiang Town
 Shunde District,
 528318 Foshan City, Guangdong Province
 PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

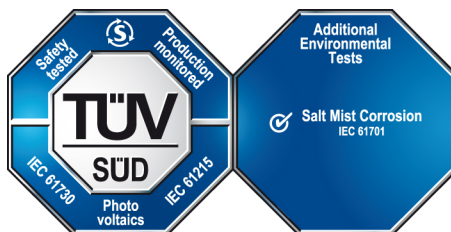

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
[Mono Crystalline Silicon Photovoltaic (PV) Module(s)]

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 64290233115903

Valid until: 2029-04-01

Date, 2024-04-02

(Billy Qiu)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

CERTIFICATE

No. Z2 116394 0028 Rev. 02

Model(s):

555D(HBD)72(182), 550D(HBD)72(182), 545D(HBD)72(182),
540D(HBD)72(182), 535D(HBD)72(182), 530D(HBD)72(182);
510D(HBD)66(182), 505D(HBD)66(182), 500D(HBD)66(182),
495D(HBD)66(182), 490D(HBD)66(182), 485D(HBD)66(182);
465D(HBD)60(182), 460D(HBD)60(182), 455D(HBD)60(182),
450D(HBD)60(182), 445D(HBD)60(182), 440D(HBD)60(182);
420D(HBD)54(182), 415D(HBD)54(182), 410D(HBD)54(182),
405D(HBD)54(182), 400D(HBD)54(182), 395D(HBD)54(182).
555C(HBD)72(182), 560C(HBD)72(182), 565C(HBD)72(182),
570C(HBD)72(182), 575C(HBD)72(182), 580C(HBD)72(182),
585C(HBD)72(182);
510C(HBD)66(182), 515C(HBD)66(182), 520C(HBD)66(182),
525C(HBD)66(182), 530C(HBD)66(182), 535C(HBD)66(182);
460C(HBD)60(182), 465C(HBD)60(182), 470C(HBD)60(182),
475C(HBD)60(182), 480C(HBD)60(182), 485C(HBD)60(182);
410C(HBD)54(182), 415C(HBD)54(182), 420C(HBD)54(182),
425C(HBD)54(182), 430C(HBD)54(182), 435C(HBD)54(182).
670D(HBD)66(210), 665D(HBD)66(210), 660D(HBD)66(210),
655D(HBD)66(210), 650D(HBD)66(210), 645D(HBD)66(210),
640D(HBD)66(210);
610D(HBD)60(210), 605D(HBD)60(210), 600D(HBD)60(210),
595D(HBD)60(210), 590D(HBD)60(210), 585D(HBD)60(210),
580D(HBD)60(210);
550D(HBD)54(210), 545D(HBD)54(210), 540D(HBD)54(210),
535D(HBD)54(210), 530D(HBD)54(210), 525D(HBD)54(210),
520D(HBD)54(210).

Parameters:

Protection class:	Class II
Max. system voltage:	1500 V d.c.
Fire safety class:	Class A or C according to UL 790
Severity of salt mist test:	Test method 6
Construction:	Framed, with Junction box, Cable and Connectors

Tested according to:

IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016
IEC 61701:2020